

Watertight Hatches

WALZ & KRENZER



An industrial watertight hatch, custom-engineered for flood protection, featuring manual or powered operation options.


Custom hatches can fit any size and pressure requirement. Additional load factors such as wheel loads and point loads from material handling equipment can also be incorporated. Flush and raised configurations are available and are operable from one or both sides.



Applications

Subfloor Access | Mechanical Areas | Water Treatment Facilities | Pumping Stations

FEATURES

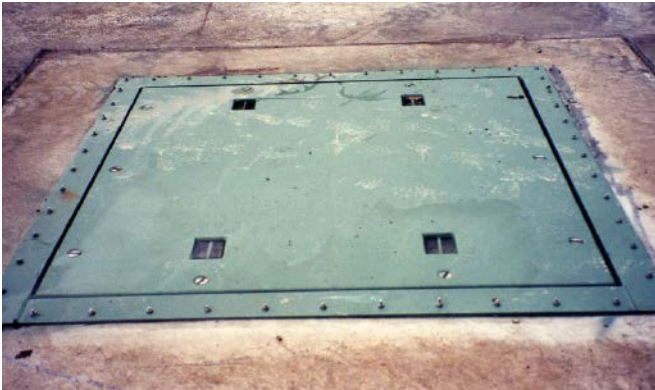

Any Size, Configuration, or Design Pressure

Hatches are sealed utilizing individual dogs, quick-acting handwheels, or drop bolts. Larger hatches may require mechanical opening assistance like gas springs, coil springs, and counter-weights, although power operation is also an option.



Custom Mounting

Flush or Raised Options



Versatile

Multiple Sealing Options Available



Engineered

No Size or Load Factor Limits



Material Options

Aluminum and Various Steel Finishes



Activation

Power Operation Available

Material Specifications

PANEL & FRAME	Mild steel, stainless steel, aluminum, various high-strength steels
GASKET MATERIAL	Neoprene, Viton, EPDM, silicone, Nitrile, and others
MECHANISM	Above via T-wrench, below via dogs, quick-acting handwheel or panic bar.